

(19) World Intellectual Property
Organization
International Bureau




(43) International Publication Date
26 May 2005 (26.05.2005)

PCT

(10) International Publication Number
WO 2005/047097 A1

- (51) International Patent Classification⁷: **B63B 27/14**, 27/18
- (74) Agent: SANDERSON, Nigel, Paul; Harrison Goddard Foote, Belgrave Hall, Belgrave Street, Leeds LS2 8DD (GB).
- (21) International Application Number: PCT/GB2004/004716
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MY, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (22) International Filing Date: 9 November 2004 (09.11.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
0326147.6 10 November 2003 (10.11.2003) GB
0403362.7 16 February 2004 (16.02.2004) GB
0417279.7 3 August 2004 (03.08.2004) GB
- (71) Applicant (for all designated States except US): **THE ENGINEERING BUSINESS LIMITED** [GB/GB]; Broomhaugh House, Riding Mill, Northumberland NE44 6EG (GB).
- (72) Inventors; and
(75) Inventors/Applicants (for US only): **WATCHORN, Michael, John** [GB/GB]; The Old Coach House, High Mickley, Stocksfield, Northumberland NE43 7LU (GB). **GRINSTED, Timothy, William** [GB/GB]; Beaumont House, Stocksfield, Northumberland NE43 7TN (GB).
- Published:
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: ACCESS METHOD BETWEEN MARINE STRUCTURES AND APPARATUS



(57) Abstract: Access means are provided for accessing a fixed offshore structure such as a wind turbine (70), larger vessel or the like form a smaller transfer vessel (50), or for providing for transfer between vessels. One or more guide wires (12) are connected from the vessel (50) to the fixed structure (70) or second vessel and placed in tension such as by directing the transfer vessel away from the fixed structure. In one embodiment, inflatable, members are suspendable from the guide wires and inflation of the inflatable members causes them to extend along the guide wires to form an access surface (56) across which personnel may walk to access the fixed structure or second vessel from the first vessel. Mounting means are also provided which accommodate relative rotational, translational and pitching movement of the apparatus and vessel, caused by wave motion. In another embodiment, a bridge member is retained on a runway of the first vessel and deployed using said guide wires (12).

ACCESS METHOD BETWEEN MARINE STRUCTURES AND APPARATUS

The present invention relates to method and apparatus for providing access between marine structures, and more especially for providing access from a vessel, such as a relatively small vessel, to a relatively larger vessel or to a fixed offshore structure, or between two vessels, especially larger vessels. In the case of transfer between vessels, the invention is particularly advantageous when the vessels are in open water and/or under way. Said access may be, or may include, the transfer of personnel and/or the transfer of goods and equipment.

When at sea, or on similar large body of water such as larger lakes, it is often necessary for personnel or equipment to transfer from one "marine structure" to another. In the context of this application, the term "marine structure" refers to: each of two vessels of preferably of broadly similar size between which transfer is effected; or to each of a relatively small boat ("transfer vessel") employed to carry personnel and equipment to a worksite and the worksite itself. The worksite might be a larger vessel, such as when a pilot needs to board the larger vessel from a pilot boat, or a fixed offshore structure such as an oil or gas rig, wind turbine or the like where maintenance workers need access from time to time. Most preferably one of the marine structures between which transfer is effected is a vessel navigable under its own power. In the context of transfer from a relatively small transfer vessel such as an RIB and given that the motion of a larger vessel is usually much less relative to the motion of a smaller transfer vessel, the term "fixed structure" will be used hereinafter to refer to both fixed offshore structures and relatively larger vessels. "RIB" refers to a "rigid inflatable boat" also known as "RHIB" or "rigid hull inflatable boat".

Conventionally, a worker is required to step from the transfer vessel onto a flexible or rigid ladder or onto a rigid gangway at the side of the fixed structure. This is hazardous, particularly for those who are not accustomed to working in a marine environment. In all but the calmest of seas, relative motion between the transfer vessel and the fixed structure is substantial. Stepping from a moving transfer vessel onto a stationary ladder is difficult and it is easy to slip and, potentially, to

fall into the water. This carries the danger of being crushed between the transfer vessel and the fixed structure. Because of the motion of waves and the effect of currents it is, in any case, difficult to keep the transfer vessel on station, i.e. in the correct position with respect to the fixed structure, and there is also the danger of collision between the transfer vessel and the fixed structure.

Transfer between two vessels, even those of generally comparable or similar size, can be equally perilous in view of the relative motion of the vessels with respect to one another.

For these reasons, safety regulations limit the transfer of personnel from a transfer vessel to a fixed structure to times when the sea conditions are within certain parameters, typically to circumstances where the wave height is less than about 0.7m to 1m. The consequence of this is that many working days are lost when wave conditions are such that access to the fixed structure is not possible. This can represent a major expense for those involved in the construction and maintenance of offshore facilities.

The present invention seeks to alleviate these problems by providing a method and apparatus which allow safe access from a transfer vessel to offshore fixed structures, or between vessels, typically of generally similar size, in particular between larger vessels, especially in a greater range of sea conditions.

According to a first aspect of the present invention, there is provided a method of providing access from a first marine structure to a second marine structure comprising:

- providing a gangway apparatus in a stored condition on the first marine structure;
- positioning the first marine structure proximate the second marine structure;
- providing at least one guide wire attached to the first marine structure, the gangway apparatus being attached or attachable to a said guide wire by means of one or more slidable fixings;

- extending the at least one guide wire from the first marine structure and connecting the at least one guide wire between a location on the first marine structure and an attachment location on the second marine structure proximate the location of entry to the second marine structure;
- 5 controlling and, where necessary, adjusting the position of the first marine structure so that it is maintained in spaced apart relation to the second marine structure, and maintaining the at least one guide wire at a desired tension;
- moving the gangway apparatus from the stored condition to a use condition by sliding the slidable fixing(s) along a said guide wire until the gangway apparatus
- 10 spans the gap between the first marine structure and location of entry to the second marine structure.

- In one preferred embodiment the gangway apparatus comprises at least one inflatable member attached to a said guide wire by said slidable fixings and
- 15 transformable by inflation thereof from a compact state to an extended state, the method further comprising inflating the inflatable member with an inflating fluid thereby to cause the slidable fixings to slide along the guide wire as the inflatable member expands until the gangway apparatus spans the gap between the first marine structure and location of entry to the second marine structure.

- 20 Preferably the method further comprises providing two guide wires and connecting said guide wires between a location on the first marine structure and points on the second marine structure proximate the location of entry to the second marine structure.

- 25 In an alternative variation the method further comprises providing a single inflatable member with a guide wire at respective sides thereof.

- In one preferred embodiment of the method of this aspect of invention the first
- 30 marine structure is a transfer vessel and the second marine structure is a fixed structure.

In another preferred embodiment of the method of this aspect of the invention the first and second marine structures are first and second vessels.

- According to a second aspect of the invention there is provided apparatus for
- 5 providing a bridge structure for the transfer of personnel, goods or equipment from a first marine structure to a second marine structure comprising:
- at least one inflatable member being transformable from a compact state to an extended state by inflation thereof;
 - attachment means for attaching the apparatus to the first marine structure;
 - 10 means for inflating the inflatable member;
 - at least one guide wire and means for attaching the guide wire to the first marine structure the guide wire being extendable from the first marine structure and attachable to an attachment location on the second marine structure proximate the location of entry to the second marine structure;
 - 15 means mounted in use on the first marine structure for maintaining a desired tension in the at least one guide wire;
 - a plurality of slidable fixings slidable along a said guide wire on inflation of the at least one inflatable member, by means of which fixings the at least one inflatable member is operatively suspendable from the at least one guide wire.

20

In one preferred variation, the apparatus comprises a single inflatable member.

In alternative preferred variations, the apparatus comprises a plurality of inflatable members which are independently inflatable.

25

Preferably the apparatus comprises at least one inflatable member which, in its expanded state, has an upper surface which operatively forms a walkway for personnel using the bridge structure.

- 30 In another preferred variation, the apparatus further comprises means for joining two or more inflatable members together to form said walkway.

Preferably, said two or more inflatable members are joined in side-by-side relation.

In another preferred arrangement the apparatus further comprises inflatable members defining in their expanded state side walls of the bridge structure. Preferably, the apparatus further comprises means for joining two or more inflatable members together to form said side walls, said two or more inflatable members preferably being joined in side-by-side relation.

Where the apparatus comprises a single inflatable member, preferably an upper surface said inflatable member operatively forms a walkway for personnel using the bridge structure. In one preferred variation said upper surface includes a non-slip surface.

Preferably, the apparatus further comprises a plurality of upright posts attached at intervals to said inflatable member and ropes or nets attached to said posts.

In another preferred variation the apparatus further comprises at least one safety rope extending lengthwise of the bridge to which a user's safety harness is operatively attachable.

In one configuration of the invention, the at least one inflatable member is, in its expanded state, operatively suspended below a single guide wire.

Alternatively, the at least one inflatable member may be, in its expanded state, operatively suspended between a pair of substantially parallel guide wires.

In one preferred embodiment of this aspect of the invention the first marine structure is a transfer vessel and the second marine structure is a fixed structure.

In another preferred embodiment of this aspect of the invention the first and second marine structures are first and second vessels.

According to a third aspect of the invention there is provided a first marine structure (especially a transfer vessel) having mounted thereon apparatus defined in the

second aspect of the invention. Preferably the transfer vessel comprises an inflatable boat, in particular an RIB.

According to a fourth aspect of the invention there is provided a mounting structure
5 form mounting an apparatus as defined in the second aspect of the invention on a vessel, comprising at least one of:

- i) means for accommodating rotational movement of the vessel with respect to the apparatus;
- ii) means for accommodating translational movement of the vessel with respect to the apparatus; and
- 10 iii) means for accommodating pitching movement of the vessel with respect to the apparatus.

According to a fifth aspect of the invention there is provided a mounting structure
15 for mounting an apparatus as defined in the second aspect of the invention on a vessel comprising:

- a first mounting component mounted in rotationally fixed relation to the vessel
- a second mounting component mounted on the first mounting component and attached in rotationally fixed relation to the apparatus, the first and second
- 20 mounting components being rotatable with respect to one another.

Preferably, the first and second components define a slew ring bearing.

Preferably the mounting structure further comprises a first frame element disposed
25 between the second component and the apparatus and mounted with translational freedom of movement with respect to the second mounting component. (In less preferred variations of the invention, means for allowing translational movement between the vessel and the apparatus may be provided in the absence of the means for permitting rotational movement).

30

In another preferred embodiment the mounting structure further comprises biasing means adapted to bias the first frame element towards a desired location in its translational motion.

Preferably also the mounting structure further comprises a second frame element pivotally mounted with respect to the second mounting component operatively attached to the apparatus, wherein the second frame element operatively pivots
5 about a nominally horizontal axis substantially perpendicular to the longitudinal axis of the at least one inflatable member when extended. (Again, in less preferred variations of the invention, the above pivot means may be provided in the absence of the means for allowing rotational and/or translational movement between the transfer vessel and the apparatus). In the most preferred embodiments of this
10 aspect of the invention means for allowing all three of rotational, translational and pivoting movement are provided.

Preferably the second frame element is pivotally mounted on the first frame element.

15 According to a sixth aspect of the invention there is provided transfer system comprising a mounting structure as defined above and an apparatus as defined in the second aspect of the invention attached thereto.

20 A seventh aspect of the invention provides a vessel, preferably a transfer vessel, having mounted thereon a mounting structure as defined above.

An eighth aspect of the invention provides a vessel, preferably a transfer vessel, having mounted thereon a transfer system according to the sixth aspect of the
25 invention. Preferably the transfer vessel is an inflatable boat, in particular an RIB.

In another preferred embodiment of the first aspect of the invention the method further comprises providing the first marine structure with a runway and mounting the gangway apparatus on the runway in its stored condition and, when the
30 gangway apparatus is required for use, sliding the gangway apparatus along the runway.

Preferably the gangway apparatus slides along the runway contemporaneously with the step of sliding the gangway apparatus along the guide wire(s).

- 5 Preferably at least one end portion of the gangway apparatus remains connected to the runway when the gangway apparatus is in its use condition.

Preferably in one variation of this embodiment the first marine structure is a transfer vessel and the second marine structure is a fixed structure.

- 10 Preferably in another variation of this embodiment the first and second marine structures are first and second vessels.

According to a ninth aspect of the invention there is provided an apparatus for providing a bridge structure for the transfer of personnel from a first marine

- 15 structure to a second marine structure, the apparatus comprising:
a bridge member operatively moveable from a stored condition to a use condition;
a runway operatively mounted on the first marine structure and on which the bridge member is mounted in its stored condition;
20 at least one guide wire and means for attaching the guide wire to the first marine structure the guide wire being extendable from the first marine structure and attachable to an attachment location on the second marine structure proximate the location of entry to the second marine structure;
means mounted in use on the first marine structure for maintaining a desired
25 tension in the at least one guide wire;
one or more first slidable fixings attached to said bridge member by means of which the bridge member is slidable along the runway from the stored condition to, or towards, the use condition;
one or more second slidable fixings attached to the bridge member and slidable
30 along a said guide wire on deployment of the bridge member, by means of which fixings the bridge member is operatively suspendable from the at least one guide wire to span the gap between the first and second marine structures.

Preferably the runway comprises at least one rigid rail. Preferably the or each rail is rectilinear.

Alternatively, the runway may comprise one or more tensioned cables.

5

Preferably in one embodiment the first marine structure comprises a transfer vessel and the second marine structure comprises a fixed structure. Preferably the runway is mounted in use to extend from a highest point towards a central region of the vessel to a lowest point near the stern of the vessel.

10

Preferably in another embodiment the first and second marine structures are first and second vessels.

15

Preferably at least an end portion of the bridge member remains attached to the runway in the use condition.

In one variation embodiment the bridge member includes at least one inflatable member whereby the bridge member is transformable between contracted and expanded conditions by deflation and inflation of the inflatable member.

20

According to a tenth aspect of the invention there is provided a vessel, in particular a transfer vessel, having mounted thereon apparatus according to the ninth aspect of the invention. Typically, the transfer vessel is an inflatable boat, such as an RIB.

25

For a better understanding of the invention and to show how the same may be carried into effect, reference will be made, by way of example only, to the following drawings, in which:

30

Figure 1 is a diagrammatic representation of an apparatus of the invention when mounted between a transfer vessel and a fixed offshore structure;

Figure 2 is a schematic plan view of an apparatus of the invention when mounted between a transfer vessel and a fixed offshore structure;

Figures 3 and 4 are schematic cross sections through typical embodiments of the apparatus of the invention;

- 5 Figure 5 is a schematic end view of a mounting means according to the invention when attached to an apparatus of the invention;

Figure 6 is a schematic plan view of the apparatus of Figure 5;

- 10 Figure 7 is a side view of the apparatus of Figure 5;

Figures 8a and 8b are diagrammatic side views of an apparatus and mounting means according to the invention when arranged on a transfer vessel;

- 15 Figure 9 is a diagrammatic plan view of an apparatus and mounting means according to the invention when arranged on a transfer vessel; and

Figures 10a to 10c show diagrammatically the deployment of the apparatus of the invention from an RIB;

20

Figure 11 is a diagrammatic side view of an apparatus according to another embodiment of the invention when mounted on a transfer vessel;

- 25 Figure 12 is a diagrammatic side view of the apparatus of Figure 11 when partially deployed;

Figure 13 is a diagrammatic side view of the apparatus of Figure 11 when fully deployed;

- 30 Figures 14, 15 and 16 are diagrammatic plan views showing stages in the attachment of guide wires from a transfer vessel to a fixed structure, in accordance with the invention;

Figure 17 is a diagrammatic plan view of a transfer vessel and an apparatus of Figure 11, in a partially deployed state;

Figure 18 is a diagrammatic plan view of a transfer vessel and an apparatus of Figure 11 in a fully deployed state;

Figure 19 is a diagrammatic plan view showing an alternative arrangement of a guide wire extending between a transfer vessel and a fixed structure; and

Figure 20 is a diagrammatic plan view showing a further alternative arrangement of a guide wire extending between a transfer vessel and a fixed structure.

Referring now in particular to Figures 1 and 2, there is shown an apparatus 10 according to one embodiment of the invention which provides a bridge for personnel to transfer on foot from a transfer vessel 50 to a fixed offshore structure 70 and *vice versa*. The bridge is also suitable for the transfer of goods and equipment between the transfer vessel 50 and the fixed structure 70. In the embodiment illustrated, the fixed offshore structure is a part of a wind turbine, but the fixed offshore structure could equally be a larger vessel (in relation to the transfer vessel 50), a coastal structure such as a sea wall, breakwater or jetty or even (although less likely when the transfer vessel is small such as an RIB) a vessel of similar size to the transfer vessel 50. Although not specifically illustrated, the bridge apparatus of Figure 1 can be used to effect transfer of personnel and/or equipment between larger vessels typically of generally similar size such as cargo vessels or supply vessels. For use between two larger vessels, the bridge apparatus 10 will typically have broadly the same construction as a bridge apparatus 10 for use between a transfer vessel 50 and a fixed structure 70, but on a larger scale to provide a higher carrying capacity. A typical carrying capacity for transfer of equipment between vessels is about 6 tonnes.

When installed between the transfer vessel 50 and the fixed offshore structure 70, the apparatus 10 provides a means by which personnel such as commissioning or maintenance personnel for a wind turbine can step between the transfer vessel 50

and the fixed structure 70 with greater safety and in a wider range of sea conditions and also a means by which maintenance or repair equipment can be transferred from the transfer vessel 50 to the fixed structure 70. At its point of attachment to the fixed structure 70, the relative motion of the apparatus 10 with respect to the fixed structure 70 is slight, or even negligible, and similarly the relative motion between the apparatus 10 and the vessel 50 at the point where the apparatus 10 meets the vessel is minimised, despite the fact that the transfer vessel may be pitching, rolling or moving back and forth by action of the waves on the vessel 50. Thus the health and safety risks associated with stepping from a vessel 50, moving unpredictably because of wave motion, to the fixed structure 70 are eliminated.

In summary, the apparatus 10 uses one or more tensioned ropes 12 extending between the vessel 50 and the fixed structure 70 from which one or more inflatable members are suspended. When inflated, the inflatable members 14 extend from the vessel 50 to the fixed structure 70 and provide a safe walkway for the transfer of personnel. Also, the vessel 50 is allowed considerable freedom of movement in maintaining its station with respect to the fixed structure 70, which allows the vessel operator to adjust the position and/or heading of the vessel to accommodate prevailing weather conditions. Further, in the unlikely event that the apparatus 10 should fail, the apparatus falls into the water and, because of the inflatable member(s) 14, the apparatus floats, so providing a safe refuge for personnel until rescue can be effected.

In use of the apparatus of this embodiment for transfer between a transfer vessel 50 and a fixed structure, the apparatus 10 is provided in its compact (non-inflated) state on the transfer vessel 50. The transfer vessel 50 is brought a location proximate the fixed structure 70 and at least one, but preferably two wires 12 carried by the vessel 50 are connected to the fixed structure 70 at a suitable location 74 of entry onto the structure, such as a ladder 72 or platform on the fixed structure 70. The location 70 is most preferably at a point which is above the maximum wave height in the prevailing conditions. On the transfer vessel 50 the wires 12 are attached to means for maintaining a substantially constant tension in

the wires 12. Suitable means include winches 16 fitted with constant tension devices. Such winches 16 are known in the art.

When connection by means of wires 12 between the transfer vessel 50 and the fixed structure 70 has been established, the transfer vessel may adjust its location to a position further away from the fixed structure 70. In the chosen location, the transfer vessel 70 thrusts away from the fixed structure 70 but is restrained from moving away by the wires 12. Thus the desired tension is maintained in the wires 12.

10

In use of the apparatus of this embodiment for transfer between two vessels, the apparatus 10 is provided in its compact (non-inflated) state on a first one of the vessels. The vessels are brought to relative locations proximate one another and at least one, but preferably two wires 12 carried by the first vessel are connected to the second vessel at a suitable location of entry onto the second vessel, such as a ladder or platform or entry port on the second vessel. The location of entry is most preferably at a point which is above the maximum wave height in the prevailing conditions. On the first vessel the wires 12 are attached to means for maintaining a substantially constant tension in the wires 12. Suitable means include winches 16 fitted with constant tension devices. Such winches 16 are known in the art.

20

When connection by means of wires 12 between the respective vessels has been established, one or both of the vessels may adjust its location to a position such that the vessels are spaced further apart and the vessels then maintain their station with respect to one another. The winches accommodate some relative movement between the vessels while maintaining the desired tension in the wires 12.

25

The apparatus 10 comprises a plurality of slidable fixings 18 through which a wire 12 passes. The slidable fixings 18 connect the inflatable members 14 to the wire(s) 12, whereby the inflatable members 14 may be suspended from the wire(s) 12. The slidable fixings 18 may conveniently include rings through which a wire 12 passes. To establish the walkway between the transfer vessel 50 and the fixed structure 70, or between respective vessels, the inflatable members 14 are inflated

30

with a suitable inflation fluid which is most conveniently air. The air may be pumped into the inflatable members 14, or may be supplied from an air storage source such as compressed air cylinders.

- 5 The inflatable members 14 each take the form of a longitudinally extensive tube which, when extended, spans the gap between the transfer vessel 50 and the fixed structure 70 or between respective vessels. The tubes are preferably independently inflatable, so that any inflation failure of one tube does not cause failure of others of the inflatable tubes 14. Thus, inflation of the inflatable members causes the
- 10 slidable fixings 18 to slide along the wire(s) 12 as the inflatable members extend, until the inflatable members 14 are fully extended and suspended from the guide wire(s) 12. Thus, in its inflated state, the apparatus 10 of the invention, and in particular the inflatable members 14, extend from the vessel to the point of entry 74 to the fixed structure 70 or to the second vessel. In this state, the inflatable
- 15 members 14 may be fixedly secured to the guide wire(s) 12 to prevent any retraction of the inflatable members 14.

- In a preferred arrangement, safety ropes may be provided substantially co-extensive with the inflatable members 14 to which safety harnesses worn by
- 20 personnel may be attached during transfer across the apparatus 10.

- In using the apparatus 10, personnel step onto a surface defined (or supported) by an inflatable member 14. This transition is made from a safe area well within the deck area 52 of the transfer (or first) vessel 50, so that in the event of any slip or
- 25 trip at this stage the person 54 remains on the deck 52. Personnel then move along the apparatus 10 by walking along the surface 56 until they reach the entry location 74 of the fixed structure or second vessel where they can safely step onto the access ladder 72, platform or deck before undipping their safety harness. The step onto the entry location 74 is easy in the absence of any significant relative
- 30 motion between the apparatus (bridge structure) 10 and the fixed structure 70 or second vessel (as appropriate).

Referring in particular to Figures 3 and 4 it can be seen that the apparatus 10 of the invention may comprise a plurality of inflatable members 14a, 14b and 14c. In the embodiment of Figure 3, principal inflatable members 14a are attached to the slidable fixings which in turn are supported on a pair of guide wires 12. Inflatable
5 members 14b define the surface on which personnel 54 may walk across the apparatus 10 and inflatable members 14c define side walls which assist in preventing personnel 54 from falling from the structure.

The construction of the embodiment in Figure 4 is similar, except that the inflatable
10 members are suspended via slidable fixings 18 from a single guide wire 12. In each of the embodiments of Figures 3 and 4 the individual inflatable members 14 may be joined one to another, but each is most preferably independently inflatable.

Although the apparatus 10 of the invention has been principally described above as
15 employing a plurality of inflatable members 14, in another preferred and advantageous embodiment a single inflatable member 14d may be used. Such a construction is illustrated in Figures 5, 8a, 8b and 10. In this embodiment, an upper part of the inflatable member 14d provides a surface on which personnel 54 may traverse the apparatus 10. In preferred arrangements, this upper surface may
20 be provided with a non-slip surface, such as a non-slip coating. In alternative arrangements, a surface 58 on which personnel 54 walk may be supported by an upper surface of the inflatable member 14d. Ideally in this embodiment, a plurality of upright posts 56 attached at intervals to said inflatable member 14d is provided and ropes or nets 57 are attached to said posts 56. The upright posts 56 may, for
25 example, be attached in fixed relation to some of the slidable fixings 18, for example to every third fixing 18. In this way, when the apparatus 10 is in its compacted state, the upright posts 56 lie in close proximity to one another and become spaced apart as the inflatable member 14d achieves its expanded state (see in particular Figure 10a to 10c). Alternatively, the upright posts 56 may be
30 separately attachable to the inflatable member 14d after its expanded state has been reached. Ropes or nets 57 extending between the upright posts 56 assist in preventing personnel 54 from falling from the apparatus 10 when traversing it, and a safety rope may be provided, attached for example to first and last upright posts

56, to which a safety harness be clipped. Cross members 60 may be provided which extend laterally between respective pairs of upright posts 56 for assisting in retaining the upright posts 56 in their desired position.

- 5 Figures 5 to 10 illustrate in particular mounting means 80 for use with certain embodiments of the apparatus of the present invention which provides compliant freedom for the transfer vessel 50 with respect to the apparatus 10, so that the transfer vessel 50 can surge, traverse back and forth, pitch and roll with respect to the apparatus 10, in response to wave movement to which the transfer vessel 50 is
- 10 subject, without adversely affecting the apparatus 10, its mountings or the fixed structure 70 and, more especially in the case of smaller transfer vessels 50 such as RIBs, without allowing the apparatus 10 to adversely affect the transfer vessel 50. Similarly, the mounting means 80 assists in accommodating relative movement between first and second vessels when the apparatus of the invention is used for
- 15 transfer between vessels.

- Referring in particular to Figures 5 to 7 the mounting means 80 comprises a first mounting element 82 which provides the transfer vessel 50 and the apparatus 10 with rotational freedom with respect to one another. The first mounting element 82
- 20 comprises a first mounting component 84 which is fixedly attached to the deck of the transfer vessel 50 and a second mounting component 86, attached to the first mounting component and which also is (indirectly) attached to the apparatus 10. The mounting components 84, 86 have rotational freedom with respect to each other. A preferred form of the first mounting element 82 is a slew ring bearing.
- 25 Thus, by means of the first mounting element 82, after the apparatus 10 of the invention has been attached to the fixed structure 70, the transfer vessel 50 is free to adopt a suitable heading, during the transfer of personnel 54, or goods or equipment, to favour the weather or sea conditions. A range of different headings is illustrated by positions A, B and C of the apparatus 10 in Figure 9. The heading is
- 30 typically determined by weather, waves, currents or obstructions at the transfer site.

The arrangement in relation to use of the apparatus of the invention for transfer between vessels is similar. The first and second mounting components 84, 86 accommodate differences in the course or heading of the vessels and also accommodate relative forward and back motion between the vessels.

5

Attached to the second mounting component 86 is a first frame element 88. The first frame element includes first and second parts 88a, 88b which are slidably mounted with respect to one another. Specifically, part 88a is mounted in fixed relation to second mounting component 86 and part 88b is free to execute translational movement with respect to part 88a. The translation freedom of the part 88b with respect to part 88a accommodates the back and forth movement of the transfer vessel 50 with respect to the apparatus 10, as can be seen from a comparison of Figures 8a and 8b. The permitted movement of the vessel which is accommodated is indicated by arrows D-D. Similarly, for transfer between two vessels using the apparatus of the invention, the second mounting component 86 and frame element 88 accommodate relative motion of the vessels towards and away from one another.

In a preferred embodiment, a bias is applied to the second frame element part 88b, most preferably to urge the part 88b towards the mid point of its permitted translational motion. Suitable biasing means include elastic cord (e.g. shock cord) or rate controlled damping systems. One important objective of the biasing means is to provide a method of force limitation to prevent excessive force being applied to the vessel. The bias forces applied to the part 88b may be symmetrical or asymmetrical with regard to the two opposed direction of permitted movement of the part 88b.

Locking means may be provided to independently lock the first mounting element 82 to prevent rotational movement and/or to lock the part 88b with respect to part 88a to prevent translational movement, as may be desirable for transport storage or stowage of the apparatus 10.

An upper part of the component 88a may preferably define a surface 88c on which personnel may stand before stepping onto the apparatus 10. Although the surface 88c may itself be subject to translational and or rotational movement, there is little, if any, movement with respect to the apparatus 10. Thus stepping from the deck
5 52 onto the surface 88c is simple, as is stepping from the surface 88c onto the apparatus 10.

A second frame element 90 is attached to the end of the apparatus 10 to support the apparatus 10 in use. The second frame element 90 is also pivotally connected
10 at 92 to the first frame element part 88b, so that the second frame element 90 and the first frame element part 88b pivot with respect to one another about an axis E-E which is nominally horizontal and which is substantially perpendicular in use to the longitudinal axis of the inflatable member(s) 14. "Nominally horizontal" is used in the sense that the pivot axis would be substantially horizontal when the transfer
15 vessel 50 (or first vessel) is on a flat calm sea. Of course, in more usual sea conditions, some variation from the true horizontal is inevitable. The pivotal connection 92 accommodates pitch and roll of the transfer vessel 50 caused by wave motion. Similarly, when the apparatus of the invention is used for transfer between tow vessels the pivotal connection 92 accommodates relative upward and
20 downward movement of the respective vessels and rolling motion of the first vessel.

Further, the pivotal connection 92 may allow the apparatus 10, in its compact state, to be retained in a safe stowage position as indicated in Figure 10a. When required for use, the apparatus 10, supported in second frame element 90 may be pivoted
25 about axis E-E to its use position (Figure 10b), prior to inflation of the inflatable member(s) 14 (Fig 10c).

In preferred arrangements using the mounting means 80, the wires 12 may terminate on the second frame element 90. The connection between the wires 12
30 and the second frame element 90 may desirably be designed to break at a predetermined force in order to limit tensile forces applied to the transfer vessel 50 by the apparatus 10 in use, or similarly forces between a first vessel and a second vessel. Also, the attachment between the end of the apparatus 10 and the second

frame element 90 may desirably be designed to fail in the event of excessive force, thereby to allow the vessel to move away from the apparatus 10 (or the first and second vessels to move apart), for example in severe weather conditions.

- 5 Although the mounting means 80 has been primarily described in relation to an apparatus 10 comprising a single inflatable member 14d, the mounting means are also suitable for use with apparatus 10 including a plurality of inflatable members 14, such as are illustrated in Figures 3 and 4.
- 10 An alternative embodiment of the apparatus of the invention is shown in Figures 11 to 20. In this alternative embodiment, the apparatus 100 includes a bridge member 101 which is maintained in its inflated state for all or part of its working or operational period, that is, in addition to the specific time when the apparatus is disposed between a transfer vessel 150 and a fixed structure 170. For example, a
- 15 work site where the apparatus 100 of this embodiment of the invention is deployed may include a number of fixed structures 170, such as wind turbines, to or from which personnel are transferred at various times during the operational period. Likewise, transfer may be required on one occasion to a fixed structure 170 and on a subsequent occasion to a second vessel. In this case it is inconvenient to deflate
- 20 and re-inflate the apparatus 100 each time it is moved between one fixed structure 170 or vessel and another. Accordingly, in this embodiment of the invention the apparatus 100 (more specifically, the bridge member 101) is maintained in its inflated state at least for movement of the apparatus 100 from one fixed structure 170 to another fixed structure 170. For longer movements, e.g. journeys to the
- 25 work site from the transfer vessel's home port, the apparatus 100 may be in its deflated state. This embodiment is also applicable to apparatus of fixed construction, that is, apparatus in which the bridge member 101 is not inflatable/deflatable or otherwise changeable between expanded and compact states.
- 30 In accordance with this embodiment of the invention, the bridge member may comprise a single inflatable member or multiple inflatable members generally as described above, in particular with reference to Figures 3 and 4. The transfer

- vessel 150 is provided with at least one runway or slider 110 on which one part, preferably an end portion, of the bridge member 101 is mounted. The slider 110 is preferably a rigid rail or, more preferably, a pair of rails, on which the bridge member 101 is slidably mounted. The rails are preferably rectilinear, but may, if appropriate, be curved. In other constructions, the slider may be, for example, one or more tensioned wires or cables. In figures 14 to 20, a pair of rails 111, 112 is shown.
- Rails 111, 112 are fixedly mounted on the transfer vessel 150. In the illustrated example, the rails 111, 112 extend in parallel from a highest point near the central region of the vessel 150 to a lowest point near the stern of the vessel 150. As can be seen in particular in Figure 11, the bridge member 101 is carried during movement of the vessel between fixed structures 170 (and during any other movements, as required) on the rails 111, 112 so that one end 114 of the apparatus is towards the upper end of the rails 111, 112 and one end 116 of the apparatus is towards the lower end of the rails 111, 112. The end 114 of the bridge member 101 is preferably permanently attached to the rails 111, 112 and most preferably remains so attached when the bridge member is deployed, that is, in its condition of use (Fig 13). However, a releasable attachment is not precluded. The end 114 is attached by suitable means (not specifically shown) such as casters, which allow the end 114 to slide up and down the rails 111, 112 when required to do so. The end 116 may preferably be (but need not be) releasably secured to the rails 111, 112.
- For deployment of the apparatus 100, firstly the guide wire or wires 120 are secured to the fixed structure 170, preferably by one of the methods as described below. If not already (i.e. permanently or semi-permanently) attached, the end 116 of the bridge member 101 is attached to the or each guide wire 120. For the purposes of this example of the apparatus, it is assumed that there are two guide wires 120. For example, the end 116 of the bridge member 101 may include one or more slots/channels or other passageways through which the guide wires 120 pass. From the position shown in Figure 11, the bridge member 101 is caused to slide down the rails 111, 112 so that end 116 moves along the guide wires 120. For

- example, the bridge member 101 may be moved with respect to the rails 111, 112 by means of a winch and cable arrangement, or other suitable means. The bridge member 101 is so moved until the end 114 is at or near the end of the rails 111, 112 at which point it reaches its maximum extension with respect to the transfer vessel 150, as depicted in Figure 13. The position of the transfer vessel 150 is continuously monitored and adjusted as necessary so that the end 116 of the bridge member 101 is located in the desired position with respect to the fixed structure 170 so that personnel may transfer easily from the apparatus 100 to the fixed structure and likewise so that goods or equipment may be transferred. In preferred arrangements, the guide wires 120 are connected, on the transfer vessel 150, to winches 122, preferably constant tension winches whereby the transfer vessel 150 is maintained in approximately constant relation to the fixed structure 170 by adjustment of the length of the guide wires 120.
- In a preferred embodiment, the transfer vessel 150 is provided with a foldable or collapsible ladder 130 which is stowed below the line of rails 111, 112 when not required for use, so as not to interfere with the deployment of the bridge member 101. In the illustrated example, the ladder 130 is in two parts 131, 132 which are pivoted with respect to one another and are connected by a linkage 134. Linkage 134 is connected to a pivoting post 136 which pivots about an axis at 138 to move the ladder 130 from its stowed to its deployed position.

- Figures 14, 15 and 16 illustrate one method by which guide wires 120 are attached to fixed structure 170. In Figure 14, the transfer vessel 150 is shown approaching the fixed structure 170, with its bow 151 leading. When the transfer vessel 150 is proximate the fixed structure 170, guide wires 120 are attached to suitable attachment points on the fixed structure 170. As indicated above, the attachment points are so located that when the apparatus 100 is deployed, personnel may transfer safely from the apparatus 100 (bridge member 101) onto the fixed structure 170. Thus, in particular, the attachment points will normally be so located that the deployed bridge member 101 is above the maximum wave height. In the example of Figures 14 to 18, two guide wires 120 extend in parallel from the transfer vessel 150 to the fixed structure 170. Each guide wire 120 includes a loop

124 at its end which is simply placed over, on or around an appropriate attachment point 172 on the fixed structure 170. The attachment point 172 may, for example include a locking or latching means which secures the loop 124 from becoming unintentionally detached.

5

As indicated in Figures 15 and 16, after the guide wires 120 have been attached to the fixed structure 170, the transfer vessel 150 is turned and manoeuvred into its desired alignment and position with respect to the fixed structure 170. The alignment of the transfer vessel will depend on factors such as wind and sea conditions. The apparatus 10, 100 is then deployed as described above.

10

An alternative arrangement is shown in Figure 19 in which only one guide wire 120 is used. The guide wire 120 includes a single loop 124a at its end which is placed over, on or around one or more suitable attachment means 172.

15

A further alternative arrangement is shown in Figure 20 in which a single guide wire 120 is also used. In this case, the guide wire has no loop 124. Rather, the leading end of the guide wire 120 is passed through suitable attachment means 172 on the fixed structure 170 and then returned to the vessel where it is preferably connected to a winch 122.

20

The apparatus 100 with bridge structure 101 is also suitable for use in transferring personnel and/or equipment between vessel at sea. In this case, the apparatus 100 is mounted on a first of the vessels. The runway 110 (with rails 111,112) need not be arranged in a fore-and-aft alignment with respect to the first vessel. For example the runway 110 may be in an alignment abeam of the vessel to facilitate transfer between vessels located side by side. The guide wire or wires 120 are secured between the vessels, preferably using one of the arrangements described above (Figure 17 to 20, where the second vessel takes the place of fixed structure 170), and the bridge structure 101 is caused to slide along the runway 110 and the guide wire(s) 120 thereby to span the gap between the vessels. As noted above, movement of the bridge structure 101 is preferably by means of a winch and cable arrangement. Preferably constant tension winches are used to maintain the guide

25

30

wire or wires 120 at a desired tension. Preferably, the bridge structure 101 is inflatable and deflatable to minimise its volume when stowed.

Claims

1. A method of providing access from a first marine structure to a second marine structure comprising:
 - 5 providing a gangway apparatus in a stored condition on the first marine structure;
 - positioning the first marine structure proximate the second marine structure;
 - providing at least one guide wire attached to the first marine structure, the gangway apparatus being attached or attachable to a said guide wire by means
 - 10 of one or more slidable fixings;
 - extending the at least one guide wire from the first marine structure and connecting the at least one guide wire between a location on the first marine structure and an attachment location on the second marine structure proximate the location of entry to the second marine structure;
 - 15 controlling and, where necessary, adjusting the position of the first marine structure so that it is maintained in spaced apart relation to the second marine structure, and maintaining the at least one guide wire at a desired tension;
 - moving the gangway apparatus from the stored condition to a use condition by sliding the slidable fixing(s) along a said guide wire until the gangway apparatus
 - 20 spans the gap between the first marine structure and location of entry to the second marine structure.
2. A method as claimed in claim 1 wherein the gangway apparatus comprises at least one inflatable member attached to a said guide wire by said slidable fixings
 - 25 and transformable by inflation thereof from a compact state to an extended state, the method further comprising inflating the inflatable member with an inflating fluid thereby to cause the slidable fixings to slide along the guide wire as the inflatable member expands until the gangway apparatus spans the gap between the first marine structure and location of entry to the second marine
 - 30 structure.
3. A method as claimed in claim 2 comprising:

providing two guide wires and connecting said guide wires between a location on the first marine structure and points on the second marine structure proximate the location of entry to the second marine structure.

- 5 4. A method as claimed in claim 3 comprising providing a single inflatable member with a guide wire at respective sides thereof.
5. A method as claimed in any preceding claim wherein the first marine structure is a transfer vessel and the second marine structure is a fixed structure.
- 10 6. A method as claimed in any of claims 1 to 4 wherein the first and second marine structures are first and second vessels.
7. Apparatus for providing a bridge structure for the transfer of personnel, goods or equipment from a first marine structure to a second marine structure comprising:
- 15 at least one inflatable member which is transformable from a compact state to an extended state by inflation thereof;
- attachment means for attaching the apparatus to the first marine structure;
- 20 means for inflating the inflatable member;
- at least one guide wire and means for attaching the guide wire to the first marine structure, the guide wire being extendable from the first marine structure and attachable to an attachment location on the second marine structure proximate the location of entry to the second marine structure;
- 25 means mounted in use on the first marine structure for maintaining a desired tension in the at least one guide wire;
- a plurality of slidable fixings slidable along a said guide wire on inflation of the at least one inflatable member, by means of which fixings the at least one inflatable member is operatively suspendable from the at least one guide wire.
- 30 8. Apparatus as claimed in claim 7 comprising a single inflatable member.

9. Apparatus as claimed in claim 7 comprising a plurality of inflatable members which are independently inflatable.
10. Apparatus as claimed in claim 9 comprising at least one inflatable member
5 which, in its expanded state, has an upper surface which operatively forms a walkway for personnel using the bridge structure.
11. Apparatus as claimed in claim 10 comprising means for joining two or more inflatable members together to form said walkway.
- 10 12. Apparatus as claimed in claim 11 wherein said two or more inflatable members are joined in side-by-side relation.
13. Apparatus as claimed in claim 9, 10, 11 or 12 further comprising inflatable
15 members defining in their expanded state side walls of the bridge structure.
14. Apparatus as claimed in claim 13 comprising means for joining two or more inflatable members together to form said side walls.
- 20 15. Apparatus as claimed in claim 14 wherein said two or more inflatable members are joined in side-by-side relation.
16. Apparatus as claimed in claim 8 wherein an upper surface said inflatable member operatively forms a walkway for personnel using the bridge structure.
- 25 17. Apparatus as claimed in claim 16 wherein said upper surface includes a non-slip surface.
18. Apparatus as claimed in claim 8 or 16 or 17 further comprising a plurality of
30 upright posts attached at intervals to said inflatable member and safety ropes or nets attached to said posts.

19. Apparatus as claimed in any of claims 7 to 18 further comprising at least one safety rope extending lengthwise of the bridge to which a user's safety harness is operatively attachable.
- 5 20. Apparatus as claimed in any of claims 7 to 19 wherein the at least one inflatable member is, in its expanded state, operatively suspended below a single guide wire.
- 10 21. Apparatus as claimed in any of claims 7 to 19 wherein the at least one inflatable member is, in its expanded state, operatively suspended between a pair of substantially parallel guide wires.
- 15 22. Apparatus as claimed in any of claims 7 to 21 wherein the first marine structure is a transfer vessel and the second marine structure is a fixed structure.
23. Apparatus as claimed in any of claims 7 to 21 wherein the first and second marine structures are first and second vessels.
- 20 24. Apparatus as claimed in any of claims 7 to 23 for carrying out the method of any of claims 2 to 6.
25. A transfer vessel having mounted thereon apparatus as claimed in any of claims 7 to 21.
- 25 26. A transfer vessel as claimed in claim 25 comprising an inflatable boat, in particular an RIB.
27. Mounting structure for mounting an apparatus as claimed in any of claims 7 to 23 on a vessel, comprising at least one of:
- 30 i) means for accommodating rotational movement of the vessel with respect to the apparatus;
- ii) means for accommodating translational movement of the vessel with respect to the apparatus; and

- iii) means for accommodating pitching movement of the vessel with respect to the apparatus.

28. Mounting structure for mounting an apparatus as claimed in any of claims 7 to 23 on a vessel comprising:
a first mounting component mounted in rotationally fixed relation to the vessel
a second mounting component mounted on the first mounting component and attached in rotationally fixed relation to the apparatus, the first and second mounting components being rotatable with respect to one another.
29. A mounting structure as claimed in claim 28 wherein the first and second components define a slew ring bearing.
30. A mounting structure as claimed in claim 28 or 29 further comprising a first frame element disposed between the second component and the apparatus and mounted with translational freedom of movement with respect to the second mounting component.
31. A mounting structure as claimed in claim 30 further comprising biasing means adapted to bias the first frame element towards a desired location in its translational motion.
32. A mounting structure as claimed in any of claims 28 to 31 further comprising a second frame element pivotally mounted with respect to the second mounting component operatively attached to the apparatus, wherein the second frame element operatively pivots about a nominally horizontal axis substantially perpendicular to the longitudinal axis of the at least one inflatable member when extended.
33. A mounting structure as claimed in claim 32 wherein the second frame element is pivotally mounted on the first frame element.

34. A transfer system comprising a mounting structure as claimed in any of claims 28 to 33 and an apparatus as claimed in any of claims 7 to 23 attached thereto.
- 5 35. A transfer vessel having mounted thereon a mounting structure as claimed in any of claims 28 to 33.
36. A transfer vessel having mounted thereon a transfer system as claimed in claim 34.
- 10 37. A transfer vessel as claimed in claim 36 comprising an inflatable boat, in particular an RIB.
38. Apparatus substantially as hereinbefore described with reference to any of Figures 1 to 10.
- 15 39. Mounting structure substantially as hereinbefore described with reference to any of Figures 5 to 10.
40. A method substantially as hereinbefore described with reference to any of Figures 1 to 20.
- 20 41. A transfer vessel having mounted thereon apparatus as claimed in claim 38.
42. A transfer vessel having mounted thereon a mounting structure as claimed in claim 39.
- 25 43. A transfer system comprising a mounting structure as claimed in claim 39 and an apparatus as claimed in claim 38 attached thereto.
- 30 44. A transfer vessel having mounted thereon a transfer system as claimed in claim 43.
45. A method as claimed in claim 1 further comprising:

providing the first marine structure with a runway and mounting the gangway apparatus on the runway in its stored condition and, when the gangway apparatus is required for use, sliding the gangway apparatus along the runway.

- 5 46. A method as claimed in claim 45 wherein the gangway apparatus slides along the runway contemporaneously with the step of sliding the gangway apparatus along the guide wire(s).
- 10 47. A method as claimed in claim 45 or 46 wherein at least one end portion of the gangway apparatus remains connected to the runway when the gangway apparatus is in its use condition.
48. A method as claimed in any of claims 45 to 47 wherein the first marine structure is a transfer vessel and the second marine structure is a fixed structure.
- 15 49. A method as claimed in any of claims 45 to 47 wherein the first and second marine structures are vessels.
- 20 50. Apparatus for providing a bridge structure for the transfer of personnel from a first marine structure to a second marine structure, the apparatus comprising:
a bridge member operatively moveable from a stored condition to a use condition;
a runway operatively mounted on the first marine structure and on which the bridge member is mounted in its stored condition;
25 at least one guide wire and means for attaching the guide wire to the first marine structure, the guide wire being extendable from the first marine structure and attachable to an attachment location on the second marine structure proximate the location of entry to the second marine structure;
means mounted in use on the first marine structure for maintaining a desired
30 tension in the at least one guide wire;
one or more first slidable fixings attached to said bridge member by means of which the bridge member is slidable along the runway from the stored condition to, or towards, the use condition;

one or more second slidable fixings attached to the bridge member and slidable along a said guide wire on deployment of the bridge member, by means of which fixings the bridge member is operatively suspendable from the at least one guide wire to span the gap between the first and second marine structures.

5

51. Apparatus as claimed in claim 50 wherein the runway comprises at least one rigid rail.

52. Apparatus as claimed in claim 51 wherein the or each rail is rectilinear.

10

53. Apparatus as claimed in claim 50 wherein the runway comprises one or more tensioned cables.

15

54. Apparatus as claimed in any of claims 50 to 53 wherein the first marine structure is a transfer vessel and the second marine structure is a fixed structure.

20

55. Apparatus as claimed in claim 54 wherein the runway is mounted in use to extend from a highest point towards a central region of the vessel to a lowest point near the stern of the vessel.

56. Apparatus as claimed in any of claims 50 to 53 wherein the first and second marine structures are vessels.

25

57. Apparatus as claimed in any of claims 50 to 56 wherein at least an end portion of the bridge member remains attached to the runway in the use condition.

30

58. Apparatus as claimed in any of claims 50 to 57 wherein the bridge member includes at least one inflatable member whereby the bridge member is transformable between contracted and expanded conditions by deflation and inflation of the inflatable member.

59. Apparatus as claimed in any of claims 50 to 58 for carrying out the method of any of claims 45 to 49.
60. A transfer vessel having mounted thereon apparatus as claimed in any of claims 50 to 55 or any of claims 57 or 58 when dependent on claim 54.
61. A transfer vessel as claimed in claim 60 comprising an inflatable boat, in particular an RIB.
62. Apparatus substantially as hereinbefore described with reference to any of Figures 11 to 20.

1/8

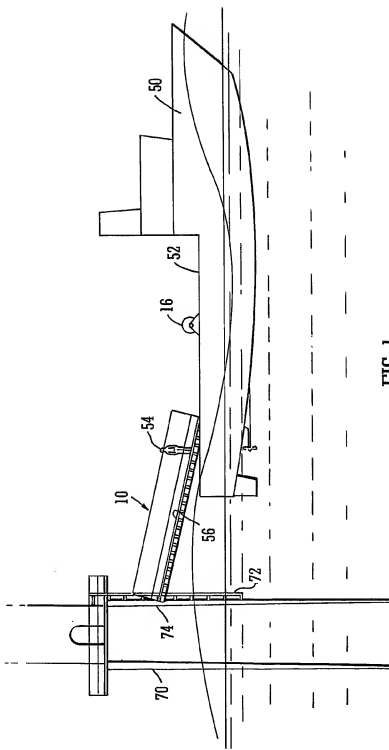


FIG. 1

2/8

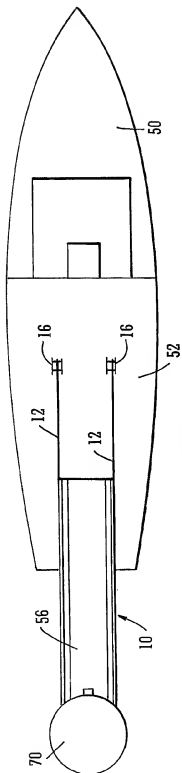


FIG. 2




FIG. 4




FIG. 3

3/8

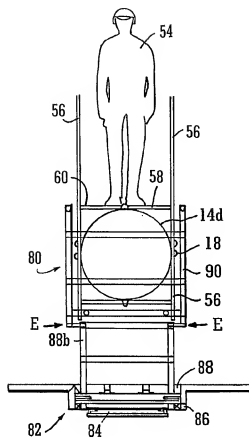


FIG. 5




FIG. 7










FIG. 6

4/8

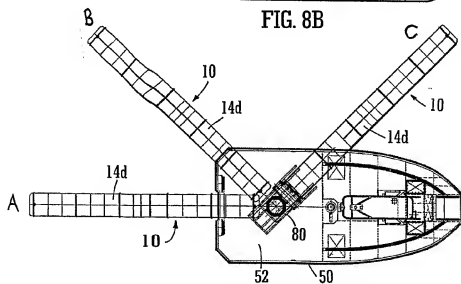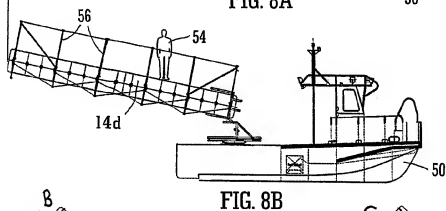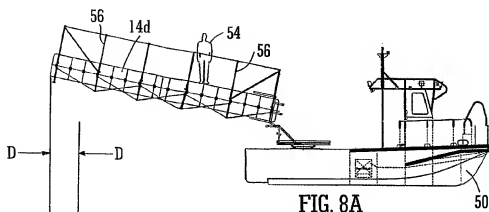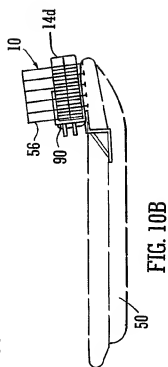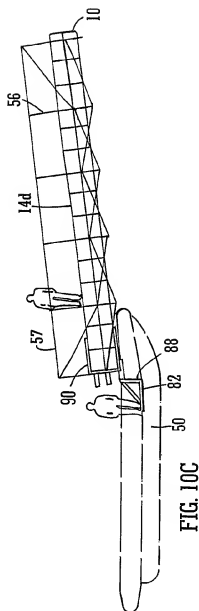

5/8



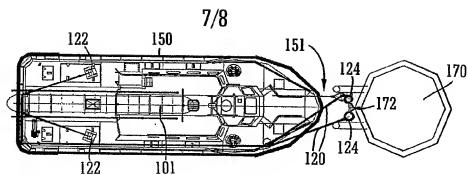


FIG. 14

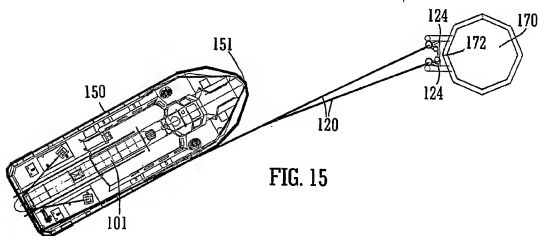


FIG. 15





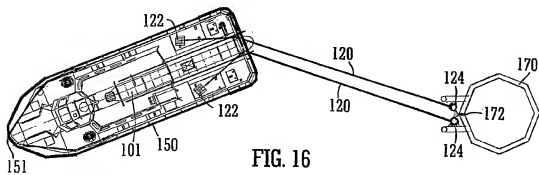


FIG. 16

8/8

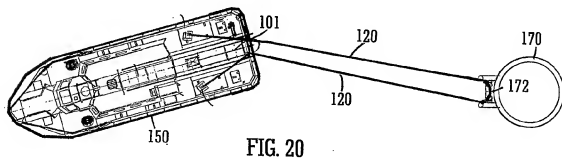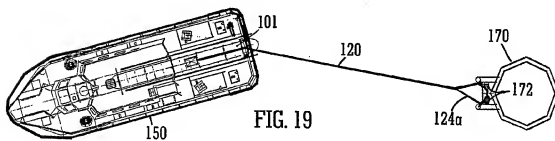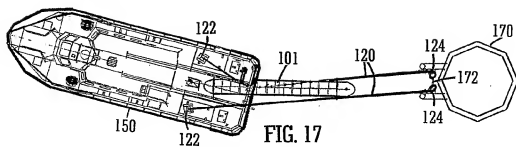

INTERNATIONAL SEARCH REPORT

Intern. Application No.
PCT/632004/004716

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 B63B27/14 B63B27/18

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B63B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No
X	GB 2 225 753 A (* OFFSHORE DESIGN ENGINEERING LIMITED) 13 June 1990 (1990-06-13)	1-5, 7-11, 16-22, 24-26, 38-44
Y	the whole document	6, 12-15, 23, 27-29, 34-36
Y	US 6 435 795 B1 (BRADY DAVID J) 20 August 2002 (2002-08-20) abstract; figures	6, 23
Y	US 2002/083881 A1 (ARIAS ANTONIO) 4 July 2002 (2002-07-04) abstract; figures	12-15
	----- -/-	



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claims) or which is cited to establish the publication date of another citation of other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step unless the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- *Z* document member of the same patent family

Date of the actual completion of the international search

11 February 2005

Date of mailing of the international search report

23/02/2005

Name and mailing address of the ISA
European Patent Office, P.O. Box 5810 Patenthaus 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 343-2040, TX 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Moya, E

INTERNATIONAL SEARCH REPORT

Inter al Application No
PCT/GB2004/004716

G.(Continued) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2003/182741 A1 (PRINS REINOUT KLAAR NORFOLC JAAP) 2 October 2003 (2003-10-02) paragraph '0016! - paragraph '0021!; figures -----	27-29, 34-36
Y	GB 2 246 992 A (ALAN * CUNDALL) 19 February 1992 (1992-02-19) page 6, line 21 - line 26; figures -----	27-29, 34,36
A	GB 2 158 793 A (* STELLINGSBYGG A/S) 20 November 1985 (1985-11-20) abstract; figures -----	1-62

INTERNATIONAL SEARCH REPORT

Information on patent family members

Inter-
national Application No.
PCT/GB2004/004716

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
GB 2225753	A	13-06-1990	NO	894730 A	05-06-1990
US 6435795	B1	20-08-2002	NONE		
US 2002083881	A1	04-07-2002	US	2001027740 A1	11-10-2001
			US	2003150368 A1	14-09-2003
			US	2004065245 A1	08-04-2004
			US	2004154523 A1	12-03-2004
US 2003182741	A1	02-10-2003	NL	1016111 C2	07-03-2002
			AU	9438801 A	22-03-2002
			BR	0113414 A	29-07-2003
			CA	2421428 A1	14-03-2002
			EP	1315651 A1	04-06-2003
			WC	0220343 A1	14-03-2002
GB 2246992	A	19-02-1992	NONE		
GB 2158793	A	20-11-1985	NO	833881 A	26-04-1985
			AU	3432284 A	22-05-1985
			BR	8407137 A	08-10-1985
			DE	3490515 T	14-11-1985
			DK	275785 A	18-06-1985
			FI	852513 A	25-06-1985
			JP	61500229 T	06-02-1986
			NL	8420236 A	02-09-1985
			WO	8501970 A1	09-05-1985
			SE	445236 B	09-06-1986
			SE	8503121 A	24-06-1985